

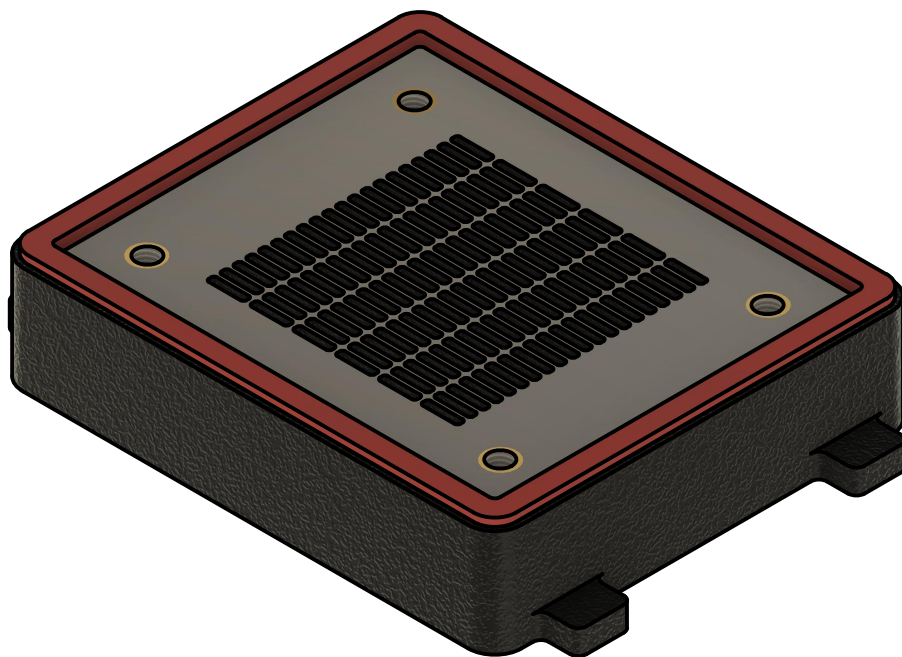



Battery Pack PRV Vent Blow Off Valve

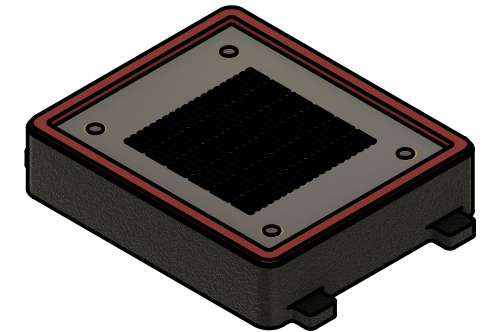


Specifications	
SKU	BATPACKPRV
Airflow @ 10kPa	≥9.5L/min
Temperature	-40°◁▷125°C
IP Rating	IP67
Water Resistance	12kPa (>1m)
Internal ref	PN5EPV700

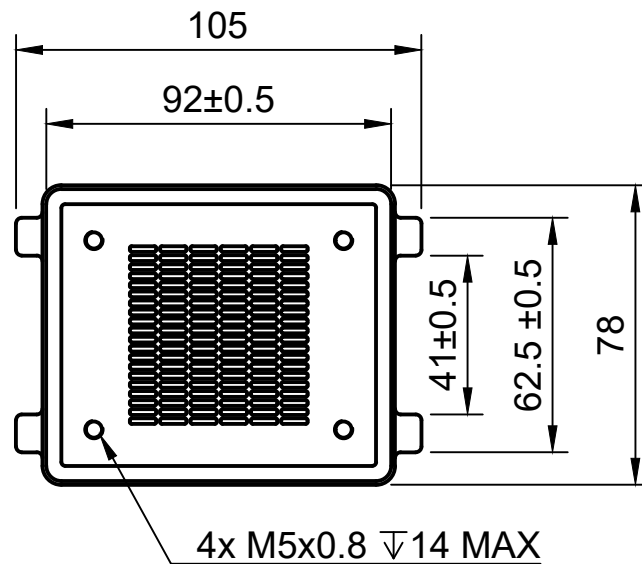

Outside face of
Battery Pack

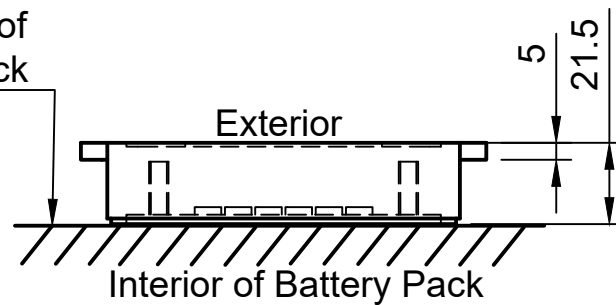

Recommended Panel Cutout

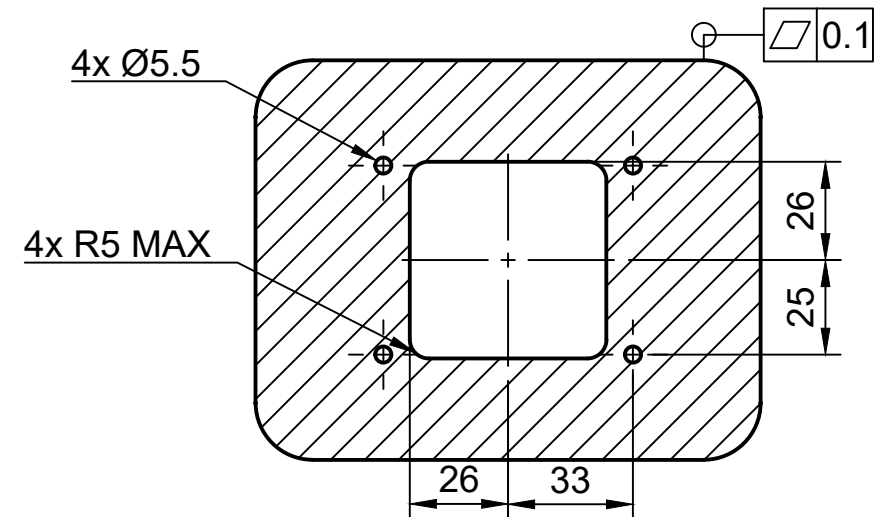

Dept.	Technical reference PN5EPV700	Material:	Created By: Ignacio Irurita 29/10/2020		
Scale 1:2		Colour: N/A	Approved By:		
Notes: - All units in mm - All dimensions are subject to ± 1mm variance		Finish:	Title: Battery Pack PRV		
			Project: Zero EV		
			Rev.	Date of issue	Sheet 2/3

Notes:

- The PRV must always be placed on the outside of the battery box and bolted on from the inside, such that the edge with the 4 small tabs is facing the exterior and the edge with the red rubber gasket is against the outside surface of the battery box.