


M5 torque setting
 Dry = 4.0 Nm
 Lube = 3.0 Nm

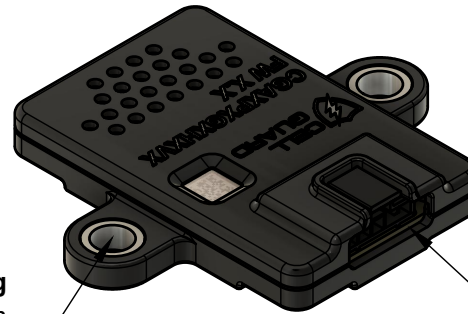

Connector

MF: Molex
 Family: Nano Fit
 PN: 1053131205

Mating PN (s):

Crimp Housing: 1053071205
 Crimp Terminal: 105300XXXX
 Crimp Retainer: 1053251005

Pinout

Pin 1: Ground
 Pin 2: Supply (9-16VDC)
 Pin 3: CAN Low
 Pin 4: CAN High
 Pin 5: LSD 500mA Function Pin

Dept. MECH	Technical reference Dimensions	Created by JH	30/09/2023	Approved by CB	01/09/2023
Scale:1:1 Units: mm Tolerance: +/-0.3 mm Mass: 15g		Document type Drawing		Document status Released	
		Title Cell Guard PN: CGAXPXGXHXVX		DWG No. ENG_MEC_DRW_CG_v3	
		Rev. 3	Date of issue 30/09/2023	Sheet 1/1	