


Technical Information

6mm²
Pvc cable in orange
with tinned copper shield layer
HIGH VOLTAGE

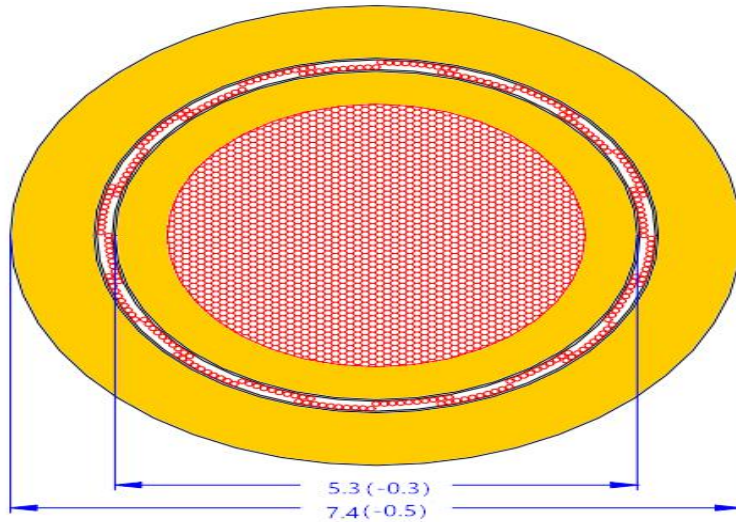

Specification

Core 6 mm²

Conductor material:	E-Cu ETP1 according DIN EN 13602
Conductor design:	Stranded bare copper 191(±5%) x max. 0.21 mm
Conductor diameter:	Max. 3.6 mm
Core insulation:	Pvc
Core diameter:	5.3mm (- 0.3)
Insulation wall thickness:	Min 0.58mm
Colour code:	White same as previous orders or orange like previous orders

Shielding

Screening braid:	Tinned copper max. 0.21 mm optical covering 100%, min 85%
------------------	--

Outer sheath

Sheath material:	Pvc
Outer diameter:	7.4mm(-0.5)
Insulation wall thickness:	min. 0.58mm
Colour code:	orange like previous orders

Marking

Outer sheath is printed:
"LOGO"+ 6mm² HIGH VOLTAGE CABLE DOUBLE-INSULATED SHIELDED 700VDC WWW.ZERO-EV.CO.UK +"LOGO"

Print can also change according to your need

Distance of marking: max. 200 mm

**Electrical
properties**

Conductor resistance : max. 3.2 mΩ/m
(DC, 20°C)

Test voltage: 2.5 kVolt /5 minutes

Nominal voltage: Max 1000 Volt DC

**Mechanical
properties**

Bend radius:
- min. 6 x cable-∅ :

Weight of cable: approx 0.115kg/m

**Thermal
properties**

Operating temperature: -20 °C to +70 °C
